


FORM AND FIBER | TECHNICAL SHEET

BLOC SERIES CORTEN STEEL PLANTERS

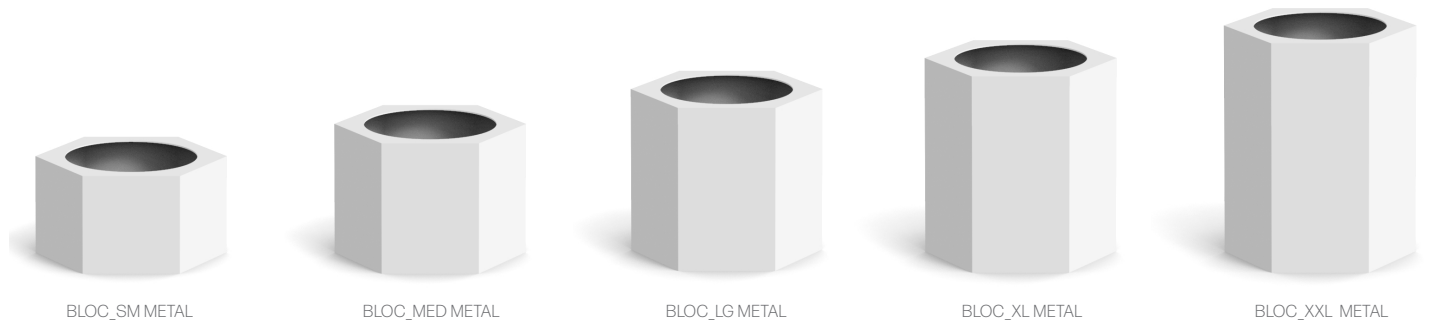

CONSTRUCTION

- The Bloc Series Corten Steel Planters are constructed of ASTM A606 Type 4 Corten Steel. Planters are fabricated using a 12 ga. thickness. Planters are offered in two finish options:
 - Un-weathered; no exterior sealant
 - Pre-weathered with exterior sealant
- Planters are manufactured with standard 1", 1.5", or 2" drain holes or no drain holes. Quantity and placement as directed by Purchaser. Holes are cut to nominal O.D. for standard PVC pipe trade sizes.

PRE-WEATHERED FINISH

- Planters do not weather with consistent color and patina among groups. Units weather at varying rates and develop coloration which is unique to each individual unit. (Standard level of finish shown)
- Standard sealant is a light metal sealant with matte finish applied to exterior and is a temporary sealant for handling. Units will continue to oxidize, patina will darken and sealant will wear off.
- Purchasers should exercise caution in placement as units may leach onto adjacent surfaces until fully weathered and self sealed.

BLOC SERIES CORTEN STEEL STANDARD SIZES

PRODUCT ID	LENGTH	WIDTH	HEIGHT	MATERIAL	THICKNESS	AVG. WT.
BLOC_C-SM	34"	34"	18"	corten steel	12 GA.	91 lbs
BLOC_C-MED	34"	34"	24"	corten steel	12 GA.	108 lbs
BLOC_C-LG	34"	34"	30"	corten steel	12 GA.	130 lbs
BLOC_C-XL	34"	34"	36"	corten steel	12 GA.	147 lbs
BLOC_C-XXL	34"	34"	42"	corten steel	12 GA.	167 lbs

STANDARD LIP

- Standard lip = 3" wide lip with no return.

CUSTOMIZATION

- Fabrication of F&F Corten Steel Bloc Series can be customized to designer specified sizes for DIAM. X H. Custom size units will be priced on labor, material, and thickness.

PRE-WEATHERED FINISH

