



FORM AND FIBER | TECHNICAL SHEET

ESSENTIALS SERIES CONCRETE PLANTERS




ES_40 CONCRETE



ES_30 CONCRETE




ES_24 CONCRETE

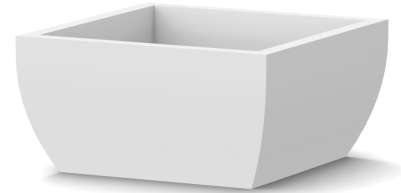

ES_24.2 CONCRETE



ES_24.3 CONCRETE



ES_18 CONCRETE



ES_14 CONCRETE



ES_14.2 CONCRETE

CONSTRUCTION

1. The Essentials Series Concrete Planters are cast with a minimum wall thickness of 3 inches. They have an average strength tested at 28-30 days of 5,810 psi.
2. Planters are lightly sanded and sealed, inside and outside, to enhance color and protect surfaces from moisture, dirt, and stains.
3. Planters are manufactured with standard 1", 1.5", or 2" drain holes or no drain holes. Quantity and placement as directed by Purchaser.
4. Holes are cast into planter using standard PVC pipe trade sizes. Holes cannot be added after casting as doing so will void unit warranty

SURFACE FINISH

1. Planters will have a naturally pitted surface finish.
2. Standard sealant is a modified polymer satin/matte finish applied to both exterior and interior of planter.

NATURAL FINISH



CONCRETE COLOR SELECTION

- Standard natural gray or select integral color pigment from Davis Colors
- Premium colors are additional, including blues, greens, and graphite black
- Davis 8084 Graphite Black is rated for interior ONLY; Manufacturer will use Exterior rated Davis 860 Graphite Black. A premium pigment upcharge will apply.
- Visit Davis Colors* at www.daviscolors.com
- *Davis Colors is a trademark of Rockwood Pigments

UNIT PRICING STRUCTURE

INCLUDED IN YOUR PRICE

- Exterior and interior sealants (planters)
- Cost of Davis subtle or standard integral pigment colors
- Premium colors, including Blues, Greens, and Graphite, are additional
- White cement based products will include an upcharge per unit

ESSENTIALS SERIES CONCRETE STANDARD SIZES

PRODUCT ID	LENGTH	WIDTH	HEIGHT	MATERIAL	THICKNESS	AVG. WT.
ES_40	26"	26"	40"	concrete	3 IN.	900 lbs
ES_30	30"	30"	30"	concrete	3 IN.	880 lbs
ES_24	48"	24"	24"	concrete	3 IN.	887 lbs
ES_24.2	48"	48"	24"	concrete	3 IN.	1350 lbs
ES_24.3	60"	24"	24"	concrete	3 IN.	980 lbs
ES_18	30"	30"	18"	concrete	3 IN.	525 lbs
ES_14	42"	42"	14"	concrete	3 IN.	725 lbs
ES_14.2	26"	26"	14"	concrete	3 IN.	385 lbs