



ES\_40CON



ES\_30CON



ES\_24CON

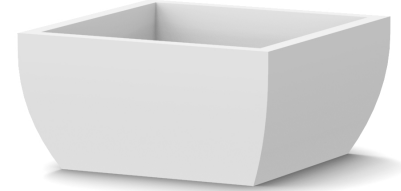

ES\_24.2CON



ES\_24.3CON



ES\_18CON



ES\_14CON



ES\_14.2CON

## CONSTRUCTION

1. The Essentials Series Concrete Planters are cast with a minimum wall thickness of 3 inches. Planters have an average strength tested at 28-30 days of 5,810 psi.
2. Planters are lightly sanded and sealed, inside and outside, to enhance color and protect surfaces from moisture, dirt, and stains.
3. Planters are manufactured with standard 1", 1.5", or 2" drain holes or no drain holes. Quantity and placement as directed by Purchaser .
4. Holes are cast into planter using standard PVC pipe trade sizes. Holes cannot be added after casting as doing so will void unit warranty.
5. Custom sizes are not available.

## SURFACE FINISH

1. Planters will have a naturally pitted surface finish. (*Reference Manufacturer's Concrete Finish Sheet*)

## CONCRETE COLOR SELECTION

1. Planters are offered in a standard gray (no pigment), or select integral color pigments. (*Reference Manufacturer's Concrete Finish Sheet*)
2. Premium colors are additional, including blues, greens, and graphite black.



## ESSENTIALS SERIES CONCRETE STANDARD SIZES

PRODUCT ID	LENGTH	WIDTH	HEIGHT	THICKNESS	AVG. WT.
ES_40CON	26"	26"	40"	3 IN.	900 lbs
ES_30CON	30"	30"	30"	3 IN.	880 lbs
ES_24CON	48"	24"	24"	3 IN.	887 lbs
ES_24.2CON	48"	48"	24"	3 IN.	1350 lbs
ES_24.3CON	60"	24"	24"	3 IN.	980 lbs
ES_18CON	30"	30"	18"	3 IN.	525 lbs
ES_14CON	42"	42"	14"	3 IN.	725 lbs
ES_14.2CON	26"	26"	14"	3 IN.	385 lbs