



FORM AND FIBER | TECHNICAL SHEET


BOX SERIES ALUMINUM POWDER COATED PLANTERS




STANDARD LIP



BLADE EDGE



STANDARD: FLAT BOTTOM

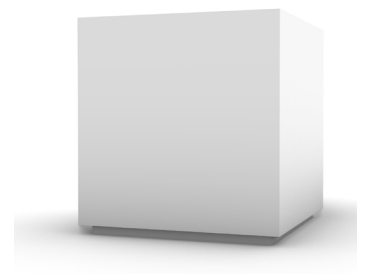

OPTIONAL: TOE-KICK

CONSTRUCTION

1. The Box Series Aluminum Powder Coated Planters are constructed of ASTM B-209 5052-H32 grade Aluminum. Planters are fabricated using .090, .125, .190, and .250 thicknesses.
2. Oversized boxes are constructed with internal reinforcement comprised of horizontal stiffeners, and vertical gussets. Specific dimensions for spacing of internal reinforcement is submitted via shop drawing for approval, prior to construction.
3. Planters are manufactured with standard 1", 1.5", or 2" drain holes or no drain holes. Quantity and placement as directed by Purchaser. Holes are cut to nominal O.D. for standard PVC pipe trade sizes.
4. If boxes with internally raised bases are specified, heat signatures may read through powder coat finish due to material thickness. *

STANDARDS

1. Standard lip for .090 and .125 thick boxes = 1" wide lip + 3/4" return
 Standard lip for .190 thick boxes = 1-1/2" wide lip + 3/4" return
 Standard lip for .250 thick boxes = 2" wide lip with no return

POWDER COAT FINISH

1. Planters are coated with an exterior grade polyester powder coat finish, available in standard stock and non-standard stock RAL colors. Marine grade finish can be provided for an upcharge per unit.
2. Non-standard stock RAL colors and metallics are available and may require an additional up-charge per unit.

POWDER COAT STANDARD STOCK COLORS



CUSTOMIZATION

1. Fabrication of F&F Aluminum Powder Coated Boxes can be customized to designer specified sizes for L X W X H. Boxes will be priced on labor, material, and thickness.

OPTIONS

1. The following options are available in the fabrication of F&F Aluminum Powder Coated Boxes. Additional charges may apply:

- Standard lip Blade edge Internally raised base*
- Flat base Toe-kick base Industrial casters
- Stainless steel leveling feet Glides

ALUMINUM POWDER COATED BOX SERIES STANDARD SIZES

PRODUCT ID	LENGTH	WIDTH	HEIGHT	MATERIAL	THICKNESS	AVG. WT.
BX_A 242418	24"	24"	18"	aluminum	0.125	28 lbs
BX_A 242424	24"	24"	24"	aluminum	0.125	35 lbs
BX_A 242436	24"	24"	36"	aluminum	0.125	49 lbs
BX_A 303018	30"	30"	18"	aluminum	0.125	39 lbs
BX_A 303024	30"	30"	24"	aluminum	0.125	47 lbs
BX_A 303030	30"	30"	30"	aluminum	0.125	56 lbs
BX_A 363624	36"	36"	24"	aluminum	0.125	66 lbs
BX_A 363630	36"	36"	30"	aluminum	0.125	78 lbs
BX_A 363636	36"	36"	36"	aluminum	0.190	138 lbs
BX_A 481824	48"	18"	24"	aluminum	0.125	56 lbs
BX_A 482424	48"	24"	24"	aluminum	0.125	64 lbs
BX_A 482430	48"	24"	30"	aluminum	0.125	76 lbs
BX_A 484836	48"	48"	36"	aluminum	0.190	196 lbs
BX_A 484848	48"	48"	48"	aluminum	0.190	245 lbs
BX_A 601824	60"	18"	24"	aluminum	0.125	68 lbs
BX_A 602424	60"	24"	24"	aluminum	0.125	76 lbs
BX_A 602430	60"	24"	30"	aluminum	0.125	91 lbs
BX_A 601836	60"	18"	36"	aluminum	0.125	95 lbs
BX_A 721824	72"	18"	24"	aluminum	0.190	119 lbs
BX_A 722424	72"	24"	24"	aluminum	0.190	135 lbs
BX_A 722430	72"	24"	30"	aluminum	0.190	159 lbs
BX_A 722436	72"	24"	36"	aluminum	0.190	184 lbs
BX_A 724848	72"	48"	48"	aluminum	0.190	318 lbs
BX_A 961818	96"	18"	18"	aluminum	0.190	125 lbs
BX_A 961824	96"	18"	24"	aluminum	0.190	153 lbs