


# FORM AND FIBER | TECHNICAL SHEET

## ESSENTIALS SERIES ALUMINUM POWDER COATED PLANTERS

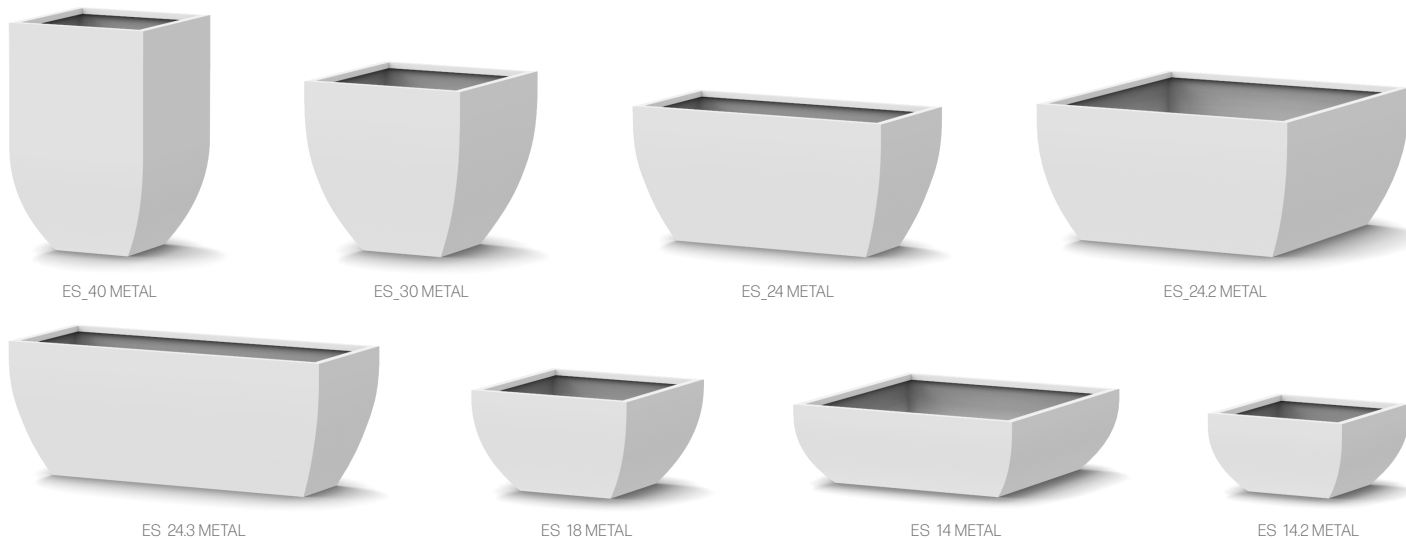

### CONSTRUCTION

1. The Essentials Series Aluminum Powder Coated Planters are constructed of ASTM B-209 5052-H32 grade Aluminum. Planters are fabricated using a .125 thickness.
2. Planters are coated with an exterior grade polyester powder coat finish, available in standard stock and non-standard stock RAL colors. Marine grade finish can be provided for an upcharge per unit.
3. Planters are manufactured with standard 1", 1.5", or 2" drain holes or no drain holes. Quantity and placement as directed by Purchaser. Holes are cut to nominal O.D. for standard PVC pipe trade sizes.

### POWDER COAT FINISH

1. Standard F&F stock powder coat colors are offered in satin and matte finishes as noted.
2. Non-standard stock RAL colors and metallics are available and may require an additional up-charge per unit.

### ESSENTIALS SERIES POWDER COATED ALUMINUM STANDARD SIZES

PRODUCT ID	LENGTH	WIDTH	HEIGHT	MATERIAL	THICKNESS	AVG. WT.
ES_40A	26"	26"	40"	aluminum	0.125	52 lbs
ES_30A	30"	30"	30"	aluminum	0.125	45 lbs
ES_24A	48"	24"	24"	aluminum	0.125	46 lbs
ES_24.2A	48"	48"	24"	aluminum	0.125	72 lbs
ES_24.3A	60"	24"	24"	aluminum	0.125	56 lbs
ES_18A	30"	30"	18"	aluminum	0.125	31 lbs
ES_14A	42"	42"	14"	aluminum	0.125	44 lbs
ES_14.2A	26"	26"	14"	aluminum	0.125	22 lbs

### STANDARD LIP

1. Standard lip = 1" wide lip + 3/4" return

### CUSTOMIZATION

1. Fabrication of F&F Aluminum Powder Coated Essentials Series can be customized to designer specified sizes for L X W X H. Custom size units will be priced on labor, material, and thickness.

### POWDER COAT STANDARD STOCK COLORS

